








REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

A
B
C
D
E
F

A
B
C
D
E
F

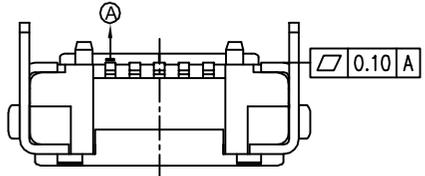

SECTION A-A'

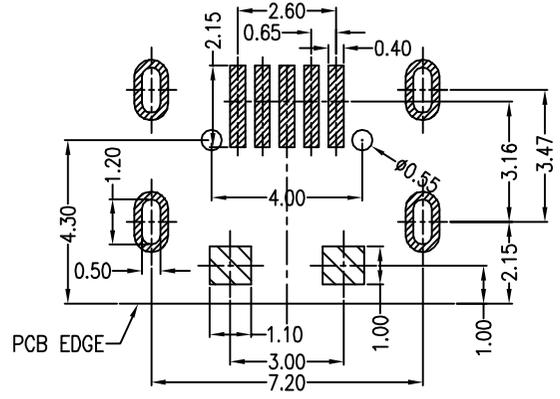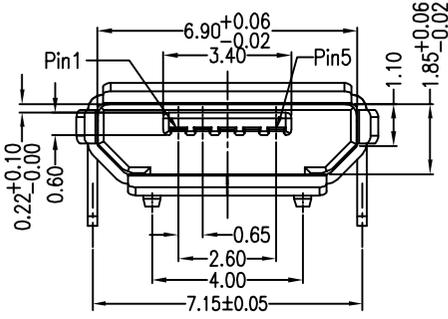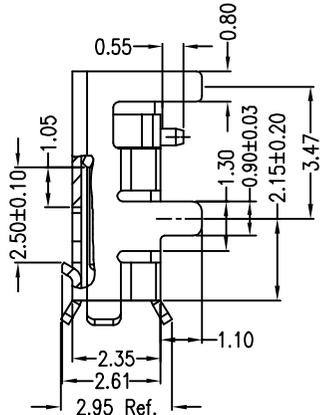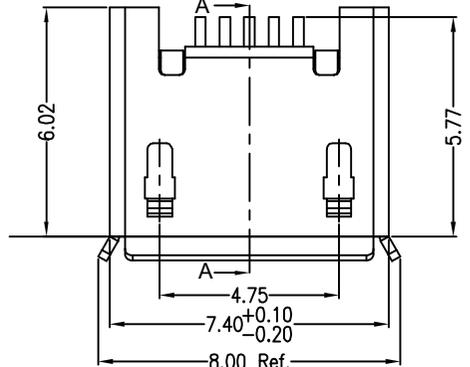

RECOMMENDED PCB LAYOUT

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f,UL94v-0
 - Contact: copper alloy,t=0.20mm
 - Shell: copper alloy,t=0.25mm
 - Specification:
 - Current rating: 1 A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 50 mW Max.
 - Insulation resistance: 100 MW Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.
 - Temperature range: -30°C~80°C

A 01 S B 1 4 1 B 1-261

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- | | |
|--------------------------|--|
| ① 产品代号 A:成品 | ⑥ 端子材质 4:G5191R-EH |
| ② 产品系列 01:micro usb 5pin | ⑦ 主体材质 1:LCP |
| ③ 产品类别 S:母座 | ⑧ 主体颜色 B:黑色 |
| ④ 产品类型 B:B TYPE | ⑨ 下板类型 1:dip(插板) |
| ⑤ 外壳材质 1:C2680R-H | ⑩ 细节流水 261:Micro usb 5P/F B Type dip 有导电柱7.2加焊盘加长0.75脚长1.1四脚全插 |

PART NO: A01SB141B1-261		MATERIAL: SEE NOTE	
MODEL NO: XX		FINISH: SEE NOTE	
UNIT: MM	SIZE: A4	COLOR: SEE NOTE	
TOLERANCE UNSPECIFIED		DR: 夏友红	
.x	0.25	CHK:	
.xx	0.20	APP:	
.xxx	0.15		
Ang.	2'		

深圳市华宁胜电子科技有限公司			
TITLE: Micro usb 5P/F B Type dip 有导电柱7.2加焊盘加长0.75脚长1.1四脚全插			
DWG NO: A261		REV: A	
SCALE: 5:1	DATE: 2013.04.16		

1 2 3 4 5 6 7 8